


SHIELDING & GLARE CONTROL QUADRALUX RANGE



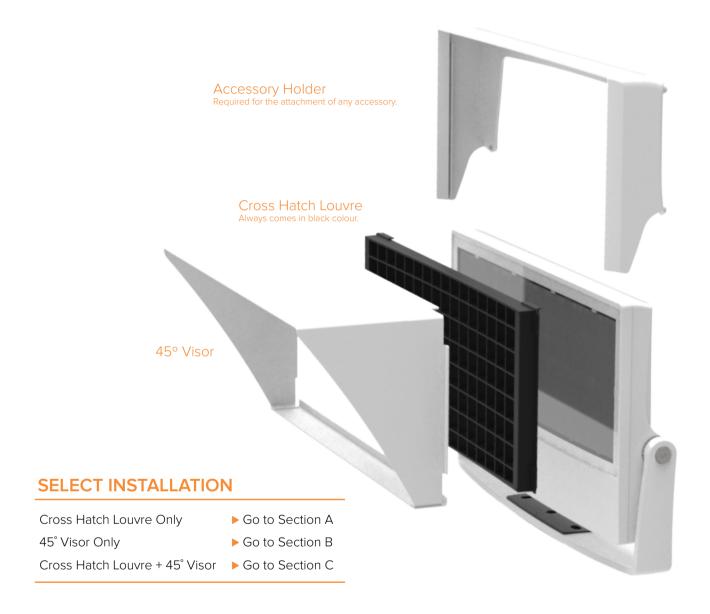

Luminare Code	Accessory Holder	Cross Hatch Louvre	45 Visor
Q2 - LS9120	LS6201	LS6202	LS6203
Q4 - LS9140	LS6205	LS6206	LS6207
Q6 - LS9160	LS6222	LS6223	LS6224
Q8 - LS9180	LS6226	LS6227	LS6228

There are a variety of shielding and glare control options available for Lumascape's Quadralux range. Even though the different luminaires within the Quadralux range differ in size, the installation process for the shielding and glare control accessories is the same for all of them. The table on the left lists the accessory codes for each luminaire type.

READ ALL SAFETY INSTRUCTIONS FIRST

- > Follow instructions carefully, failure to do so will void warranty.
- > Luminaire is factory sealed, opening luminaire will void warranty

LUMASCAPE ASIA PACIFIC Brisbane Technology Park, 18 Brandl Street, Eight Mile Plains, QLD 4113, Australia Phone +61 7 3854 5000 | Fax +61 7 3854 5001 | Email: sales@lumascape.com.au | www.lumacape.com




SHIELDING & GLARE CONTROL QUADRALUX RANGE




Section A - Install Cross Hatch Louvre Only

Slide louvre into accessories holder. Make sure all the components have the right orientation and alignment as shown below.

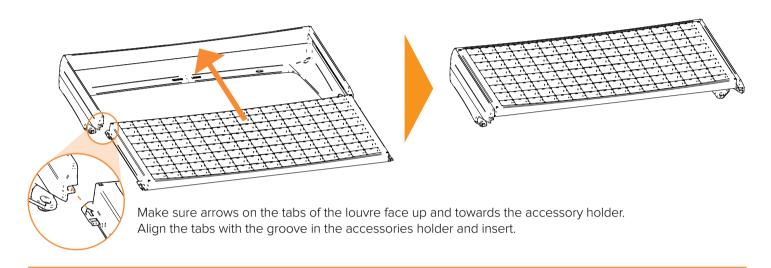

Slip the accessory holder & louver assembly over the luminaire

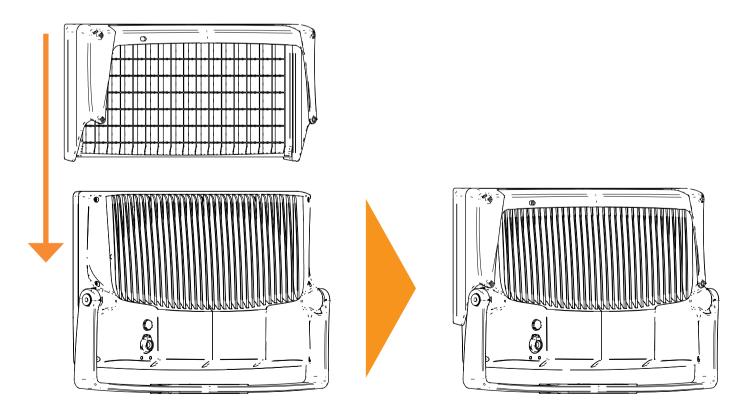




SHIELDING & GLARE CONTROL QUADRALUX RANGE




Insert the four screws to hold the assembly in place.

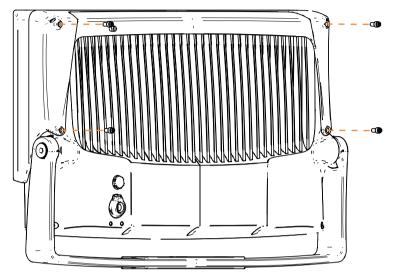

NOTE: Do not remove any screws from the luminaire body to secure the accessory holder.

Completed Assembly

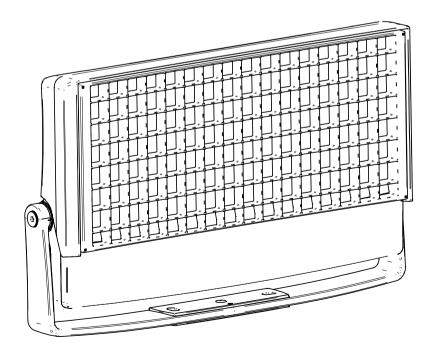




SHIELDING & GLARE CONTROL QUADRALUX RANGE




Section B - Install 45° Visor Only

Slide 45° visor into accessories holder. Make sure all the components have the right orientation and allignment as shown below.

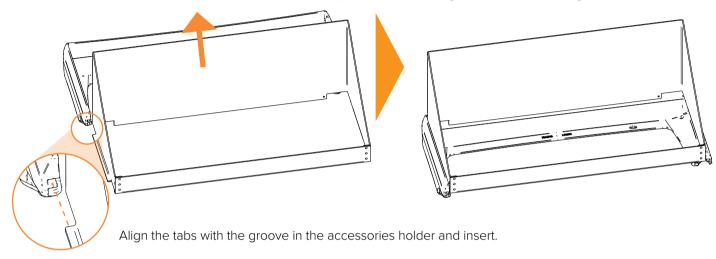

Slip the accessory holder & 45° visor assembly over the luminaire.

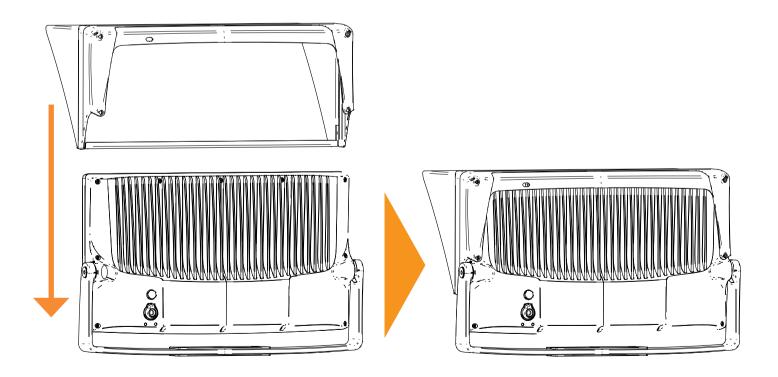




SHIELDING & GLARE CONTROL QUADRALUX RANGE




Insert the four screws to hold the assembly in place.

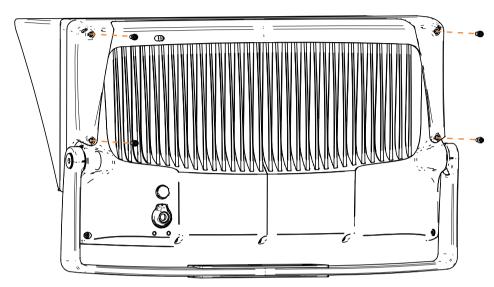

NOTE: Do not remove any screws from the luminaire body to secure the accessory holder.

Completed Assembly

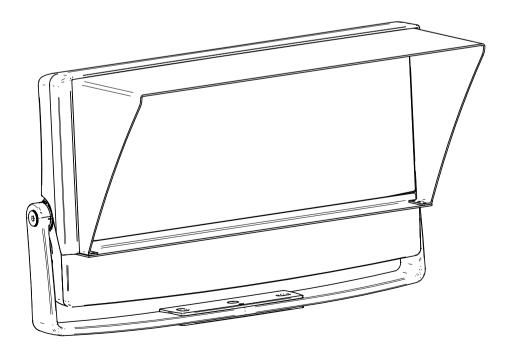




SHIELDING & GLARE CONTROL QUADRALUX RANGE




Section C - Install Cross Hatch Louvre + 45° Visor

Make sure all the components have the right orientation and allignment as shown below.

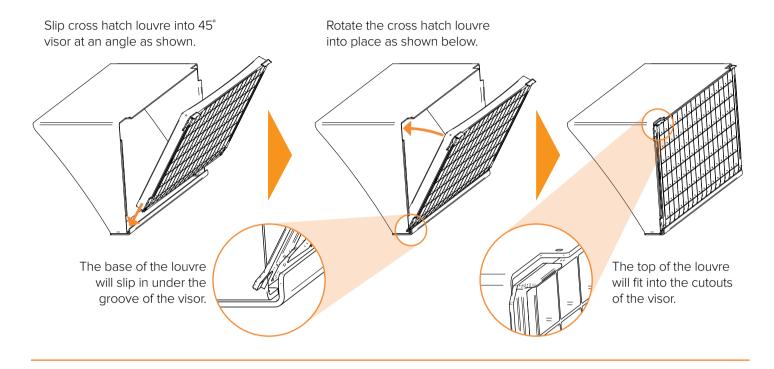

Slide 45° visor and louvre assembly into accessories holder. Make sure all the components have the right orientation and alignment as shown below.

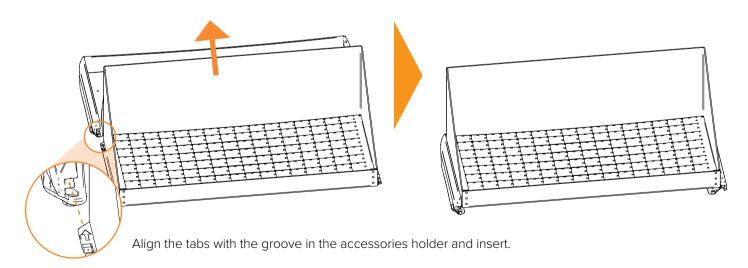





SHIELDING & GLARE CONTROL QUADRALUX RANGE



Slip the accessory holder, 45° visor and louvre assembly over the luminaire.

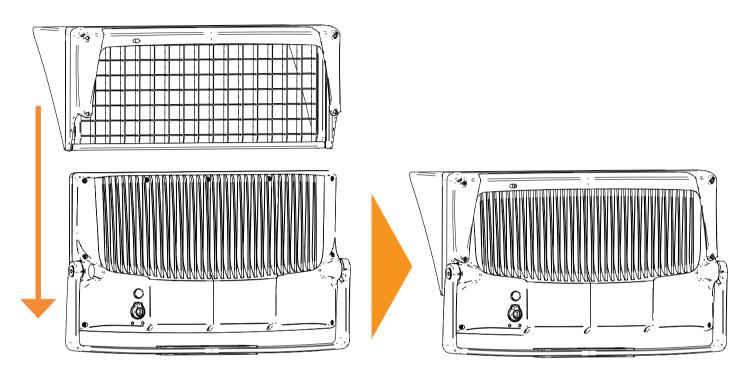

Insert the four screws to hold the assembly in place.

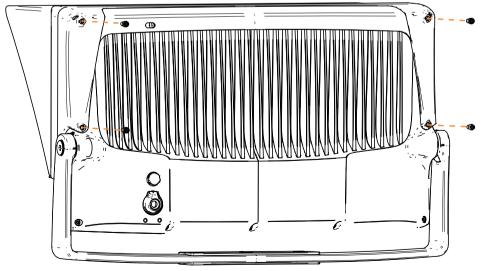

NOTE: Do not remove any screws from the luminaire body to secure the accessory holder.



SHIELDING & GLARE CONTROL QUADRALUX RANGE



Completed Assembly

