









Project Name	
Type	
Part Number	
Quantity	
Notes	

Product Overview

The Reed RD2 is a recessed wall luminaire with a slim, vertical rectangular profile. It provides over 200 delivered lumens in a forward throw distribution with a medium narrow beam. Multiple fittings can be used to effectively illuminate wide pathways, stairways and cycleways.

Features


Lumen Output	215 lm
Power Consumption	< 9 W
Typical Lifetime	> 60,000 hrs (B10, L70, TM21 Reported)
Input Voltage	International: 220-240 Vac, 50 Hz North America: 120/277 Vac, 60 Hz
Control Protocols	DALI, 0-10 V
Weight	1.2 lb (0.5 kg)
IP Rating	IP66/67
IK Rating	IK9
BUG Rating	B0-U2-G1
Compliance	   
Color Options	 

Specifications

Hero - LS1252



Dimensions - LS1252

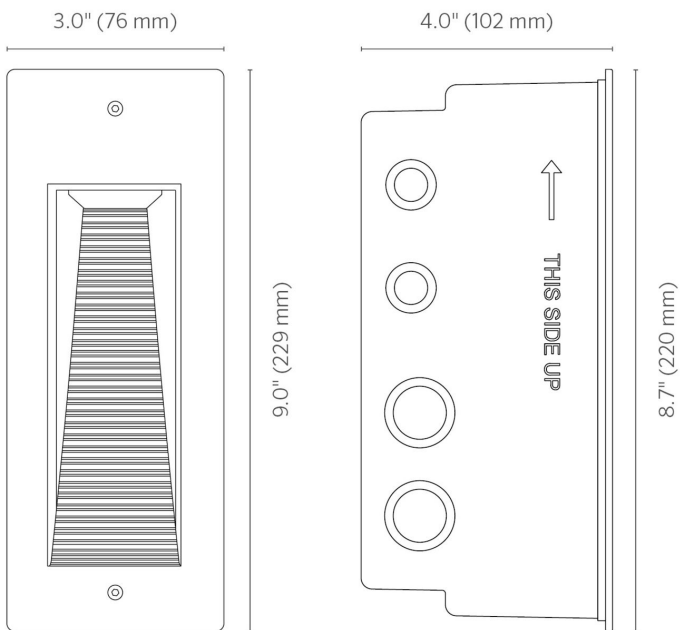

Configuration

For complete and up-to-date product options, configure the LS1252 using our online [product configurator](#).




LS1252							
Code	Power Consumption	Light Source	Style	Beam Angles	Input Voltage	Control	Finish

Power Consumption

For all PowerSync Controlled Luminaires

- 9 W (09D)**
9 W

Light Source


- Static White (827)**
2,700 K (80 CRI, 3 SDCM) 
- Static White (830)**
3,000K (80 CRI, 3 SDCM) 
- Static White (840)**
4,000 K (80 CRI, 3 SDCM) 

Style


- Recessed Baffle (RB)**
Recessed Baffle

Beam Angles

Published angles may vary slightly to photometric data. Please refer to IES files where relevant.

- Medium Throw (MD)**
50° x 30° 

Input Voltage











- 220 to 240 Vac, 50 Hz (01)**
Line Voltage 

Control

- DALI (DL)

Finish

Custom powder coat colours are available. Please consult factory.

- | | | | | | |
|--|--|--|---|---|---|
| <ul style="list-style-type: none"> <input type="checkbox"/> Black (BL)
RAL9004 from RAL
Classic collection
(formerly CB) |  | <ul style="list-style-type: none"> <input type="checkbox"/> Anthracite Gray (AG)
RAL7016 from RAL
Classic collection |  | <ul style="list-style-type: none"> <input type="checkbox"/> Basalt Gray (BT)
RAL7012 from RAL
Classic collection |  |
| <ul style="list-style-type: none"> <input type="checkbox"/> Graphite Gray (GH)
Graphite Gray |  | <ul style="list-style-type: none"> <input type="checkbox"/> Anodic Silver (SL)
RAL9006 from RAL
Classic collection
(formerly CS) |  | <ul style="list-style-type: none"> <input type="checkbox"/> White (WT)
RAL9016 from RAL
Classic collection |  |
| <ul style="list-style-type: none"> <input type="checkbox"/> Dark Bronze (DB)
RAL8019 from RAL
Classic collection |  | <ul style="list-style-type: none"> <input type="checkbox"/> Latte (LT)
RAL7006 from RAL
Classic collection |  | <ul style="list-style-type: none"> <input type="checkbox"/> Dark Aluminium (DA)
RAL9007 from RAL
Classic collection |  |
| <ul style="list-style-type: none"> <input type="checkbox"/> Custom RAL (CC)
A one-off custom color setup fee applies. Click on 'More Info' button to add to your enquiry. Contact Lumascape for volume discount on set-up fee. |  | | | | |

Accessories

Required Pre-Installation Kit

Specify Separately

- Pre-Installation Kit (LS6335)**
Required pre-installation kit used for mounting the Reed RD2 on any flat surface.



Custom Color

A one-off setup fee applies for each custom color per order. Add to your enquiry.

- Custom Color Setup Fee (Custom RAL Color)**
Custom RAL colour setup fee

