



The LS471LED is the up / down version of the Centria series. It also performs well for illuminating large wall expanses. Lenses with different beam angles can be fitted to each side. Integral electronic drivers are a standard feature of the LS471LED. Choices of beam angles, light and glare control accessories are available.

Performance

Static White & Colour	Lumen Output (lm)	Efficacy (lm/W)	Peak Intensity (cd)
● 3,000 K (80 CRI)	-	-	-
● 4,000 K (80 CRI)	2,716	77	17,649
● Blue (470nm)	-	-	-

Static white lumen output values are based on a 32W luminaire with 14° lens.

Beam Angles	14°, 20°, 30°, 40° x 10°
-------------	--------------------------

Electrical

LED Power	2 x 16W
Consumption	35W (nominal for 32W)
Input Voltage	Mains Voltage 100-277V AC, 50/60Hz

Control

Protocols	
-----------	--

Physical


Housing	LM20 die cast marine grade powder coated aluminium
Installation	Wall mount
Ambient Operating Temperature	-20°C to 50°C (-4°F to 122°F)
Surface Temperature	≤65°C (≤149°F) <b>HumanTouch™</b> Compliant

Certification & Compliance

IP Rating	IP66 / 67
Certifications	CE, ETL




Luminaire Dimensions

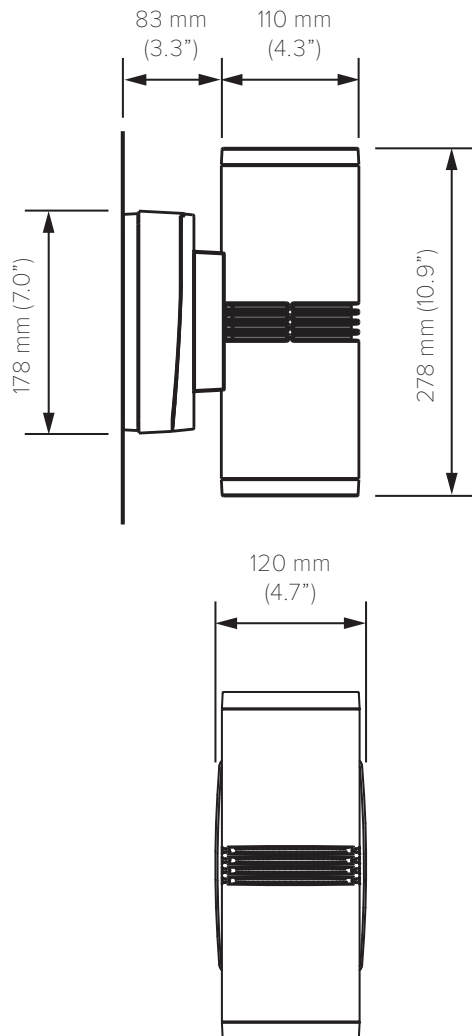


Luminaire Accessories

Stacking and order of accessories

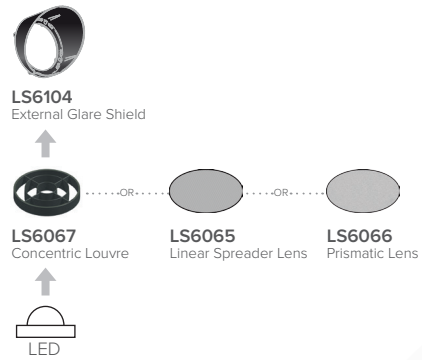

Other accessory stacking options may be available - consult factory




LS471LED		32							
<b>Power</b>	<b>Code</b>	<b>Beam</b>	<b>Code</b>	<b>Input Voltage (International)</b>	<b>Code</b>	<b>Finish</b>	<b>Code</b>	<b>Input Voltage (North America)</b>	<b>Code</b>
32W	32	Narrow	14° NR	100-240V AC, 50/60 Hz	01	Black	BL	120-277V AC, 50/60 Hz	09
<b>Static White &amp; Colour</b>	<b>Code</b>	Medium	20° ME			Anodic Silver	SL		
3000 K (80 CRI)	H6	Wide	30° WD			White	WT		
4,000 K (80 CRI)	W4	Linear Horizontal	40° x 10° LH <sup>(1)</sup>						
Blue (470 nm typical)	B4	Linear Vertical	10° x 40° LV <sup>(1)</sup>						

(1) Refer to beam orientation diagram.

Beam Orientations

Beam Orientations for the 'LH' optical system.



Beam Orientations

Beam Orientations for the 'LV' (Linear Vertical) optical system.

