



The LS582 is a surface mount version of the Balitza series. It is constructed from 316 marine grade stainless steel with Lumascope's proprietary **ElectroPolishPlus™** process. It shares the same appearance as LS482, allowing a theme to be carried through a site. The diffusion of light from this luminaire provides illuminance at ground level, as well as acting as a guide beacon.


Specifications

Lamp	50 W max	Halogen Bi-pin / QT12 (G6.35)
	60 W max	Halopin
	23 W max	CFL / SB (E26 / E27 medium)
IP Rating	IP65	
Construction	316 marine grade stainless steel	
Installation Type	Surface mount	
Ambient Operating Temperature	32 °F to 122 °F (0 °C to +50 °C)	
Glass Temperature	HumanTouch™ compliant models	
≤ 149 °F (≤ 65 °C)	20 W max	Halogen Bi-Pin / QT12
	11 W max	SB CFL



LS582 Balitza Mini

Any luminaire can become hot - take care with appropriate use and placement

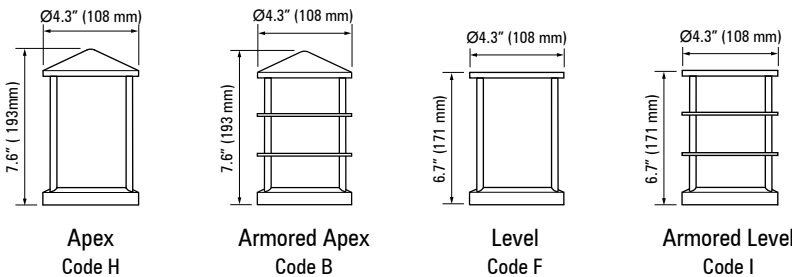

LAMP				HEAD TYPE		INPUT VOLTAGE	
Description	Wattage	Base	Code	Description	Code	Description	Code
Halogen Bi-Pin / QT12	50 W max	G4/GY6.35	293	Apex	H	220-240 V AC, 50 Hz	01
Halopin	60 W max	G9	294 ⁽¹⁾	Armored apex	B	12 V AC, 50 Hz	07 ⁽¹⁾
SB CFL	23 W max	E26 / E27 medium	291 ⁽¹⁾	Level	F	⁽¹⁾ Requires remote transformer.	
				Armored level	I		

⁽¹⁾ Not compatible with voltage code 07.